



Pulley MIKY

Lightweight pulley with two attachment holes. Designed for tree climbing application. Suitable for use with Prusik friction knot.

DESCRIPTION

Two attachment holes with strength 28 kN.

Brass self lubricating bushing.



Anodized aluminum alloy side-walls.

Aluminum alloy sheave for textile ropes and auxiliary cords up to 13mm in diameter.

KEY FEATURES

- two attachment holes
- self lubricating bushing


STANDARDS

CE 1019
EN 12278: 2007


FEATURES




28 kN



max. 13 mm




105 g




2 YEARS
warranty


MATERIALS



- 90% aluminum alloy
- 8% stainless steel
- 2% brass

TECHNICAL INFO

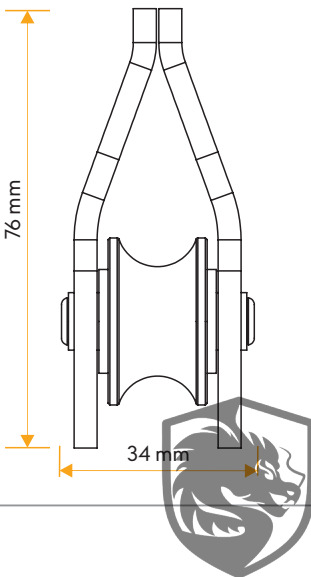

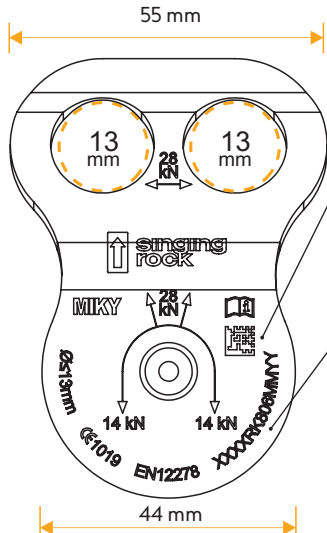

55 mm

13 mm

13 mm

28 kN

44 mm


Data Matrix: XXXXRK806MMYY

Serial number:
XXXX: unique number
Rk806: product code
MM: month of production
YY: year of production

Lifetime of the product is not strictly limited by the manufacturer. Depending on the condition of the product and its history it may be necessary to retire it immediately.



ACCESSORIES

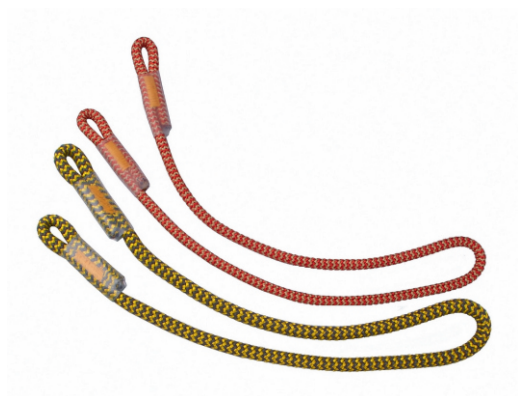

NOTES

